


## POLY-CRYSTALLINE SOLAR MODULE

### SL150-P36

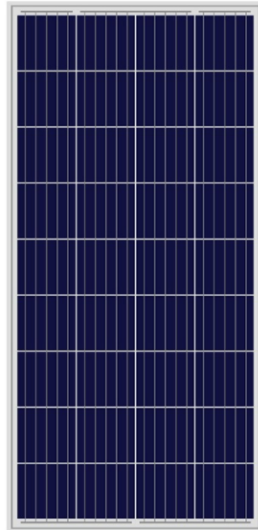

Module Type	SL150-P36
Peak Power(Pmax)	150W
Power Tolerance	±3%
Cell Type	Poly-Crystalline Silicon , 156mm×156mm
Number of Cells	36 cells in series
Weight	12.5 kg
Dimensions	1480×680×35mm
Maximu Power Voltage (Vmp)	17.8V
Maximu Power Current (Imp )	8.42A
Open Circuit Voltage (Voc)	21.6V
Short Circuit Current (Isc)	9.27A
Cell Efficiency	17.80%
Module Efficiency	16.50%
Maximu System Voltage	DC 1000V(TUV)/600V(UL)
Temp.Coeff.of Isc(TK Isc)	0.037%/C°
Temp.Coeff.of Voc(TK Voc)	-0.34%/C°
Temp.Coeff.of Pmax(TK Pmax)	-0.48%/C°
Normal Operting Cell Temperature	45±2C°
Glass Thickness	3.2 mm
Static Loading	≤5400Pa
Cable Cross Section Size	4mm <sup>2</sup>
Warranty	25 years 90% and 30 years 80% of power warranty