

## High-Temp Long Life GEL Deep Cycle Battery

## HTB12-300

HTB series uses the newly developed nano gel electrolyte with super-C additive plus heavy duty plates design inside. The HTB series has a long service life and can provide optimum and reliable service under extreme condition such as high temperature and frequent power failure, This series is highly suited for tropical area in outdoor applications such as Telecom BTS stations and Off-grid PV system.

12V  
300Ah

GEL  
Technology

Deep  
Cycle



### COMPLIED STANDARDS

IEC 60896-21/22 JIS C8704  
IEC61427 BS6290 part4  
GB/T 19638 CE/ISO

### Applications


- BTS Stations
- Solar & Wind energy system
- UPS system
- Telecom systems
- Wheel chair, Golf Car

### General Features

- ✓ Able to operate at 40-60°C
- ✓ DOD 50% 1500 times Cycles
- ✓ Integrated design to ensure the best Uniformity and reliability
- ✓ Long life and high stability under high temp. environment (no air-con needed)
- ✓ Use super-C additives: Deep discharge recovery capability

### Dimensions & Weight

Length(mm)	520±1
Width(mm)	268±1
Height(mm)	203±1
Total Height(mm)	207±1
Weight(kg)	71.3±3%

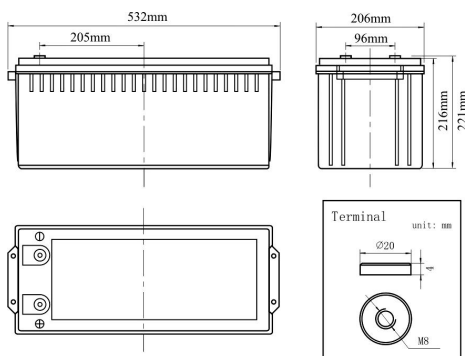

### Technical Specifications

Nominal Voltage		12V (6 cells per unit)
Design Floating Life @25°C		20 Years
Nominal Capacity @25°C (100 hour rate@30.0A,10.8V)		300Ah
Capacity @25°C	20hour rate (13.0A,10.8V)	260Ah
	5 hour rate (41.4A,10.5V)	207Ah
	1 hour rate (144.1A,9.6V)	144.1Ah
Internal Resistance	Full Charged Battery@25°C	≤3.0mΩ
Ambient Temperature	Discharge	-25°C~60°C
	Charge	-25°C~60°C
	Storage	-25°C~60°C
Max.Discharge Current@25°C		1200A(5s)
Capacity affected by Temperature (10 hour )	40°C	108%
	25°C	100%
	0°C	90%
	-15°C	70%
Self-Discharge@25°C per Month		3%
Charge (Constant Voltage) @25°C	Standby Use	Initial Charging Current Less than 46.8A Voltage 13.6-13.8V
	Cycle Use	Initial Charging Current Less than 46.8A Voltage 14.4-14.9V

### Battery Discharge Table

#### Discharge Constant Current per Cell (Amperes at 25°C)







F.V/Time	5min	10min	15min	30min	45min	1h	2h	3h	5h	8h	10h	20h
1.60V	617.8	393.8	334.6	213.6	157.0	144.1	91.6	64.4	43.8	28.8	25.7	14.3
1.65V	606.5	386.7	328.5	209.8	154.2	141.5	90.0	63.2	43.0	28.3	25.3	14
1.70V	595.3	379.5	322.5	205.9	151.3	138.9	88.3	62.0	42.2	27.8	24.8	13.8
1.75V	584.1	372.3	316.4	202.0	148.4	136.3	86.6	60.8	41.4	27.3	24.3	13.5
1.80V	561.6	358.0	304.2	194.2	142.7	131.0	83.3	58.5	39.8	26.2	23.4	13.00

#### Discharge Constant Power per Cell (Watts at 25°C)

F.V/Time	5min	10min	15min	30min	45min	1h	2h	3h	5h	8h	10h	20h
1.60V	1189.2	758.1	644.1	411.3	302.3	277.5	176.4	123.9	84.2	55.5	49.5	27.5
1.65V	1167.6	744.3	632.4	403.8	296.8	272.4	173.2	121.6	82.7	54.5	48.6	27.0
1.70V	1145.9	730.5	620.7	396.3	291.3	267.4	170.0	119.4	81.2	53.5	47.7	26.5
1.75V	1124.3	716.8	609.0	388.8	285.8	262.3	166.8	117.1	79.6	52.5	46.8	26.0
1.80V	1081.1	689.2	585.6	373.9	274.8	252.3	160.4	112.6	76.6	50.5	45.0	25.0

**Note:** The above data are average values, and can be obtained within 3 charge/discharge cycles. These are not minimum values. Cell and battery designs/specifications are subject to modification without notice. Contact **US** for the latest information.

### Performance Characteristics

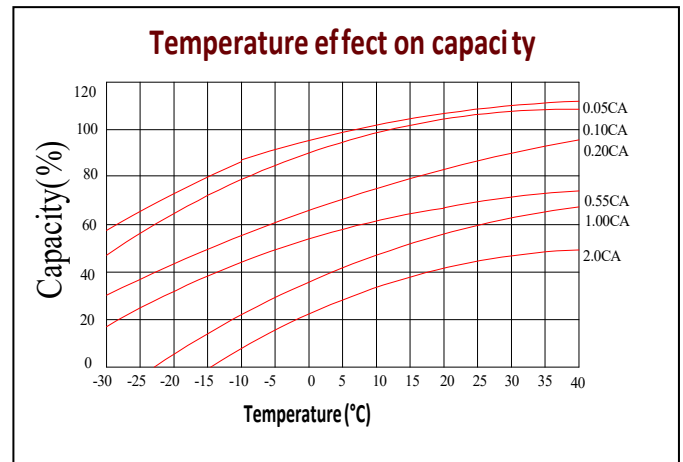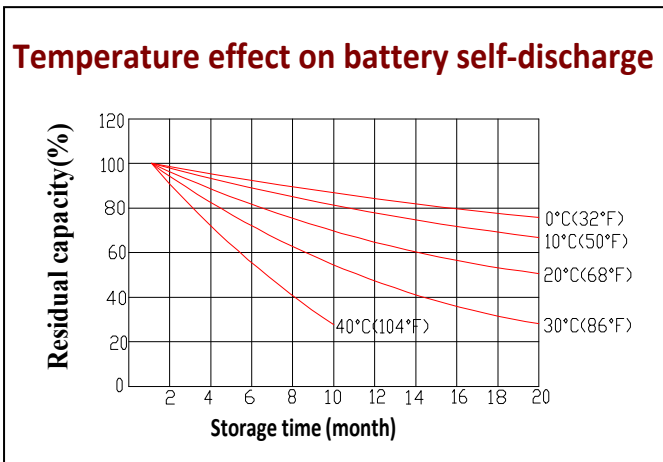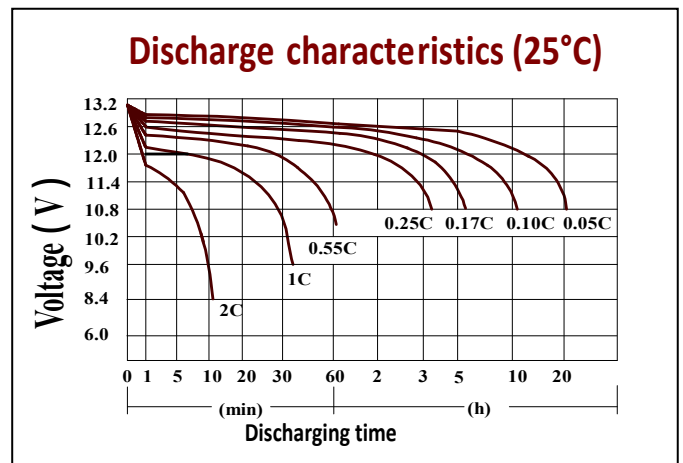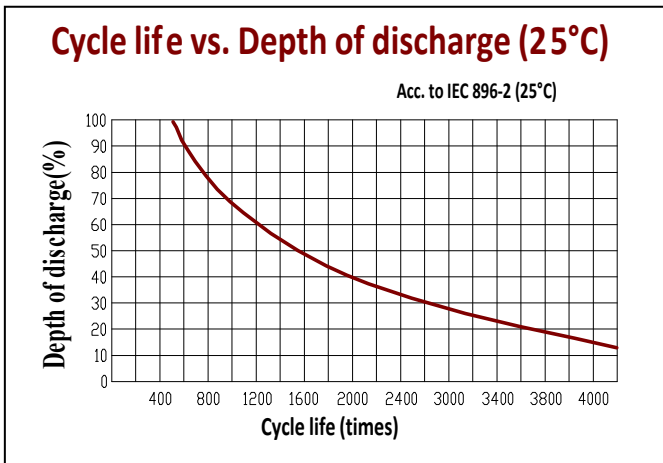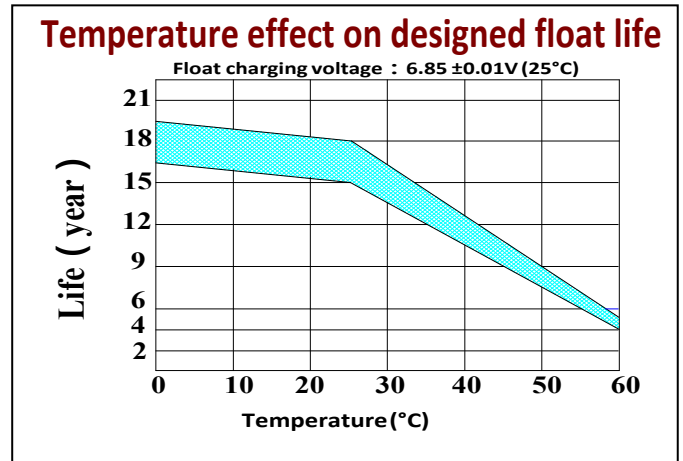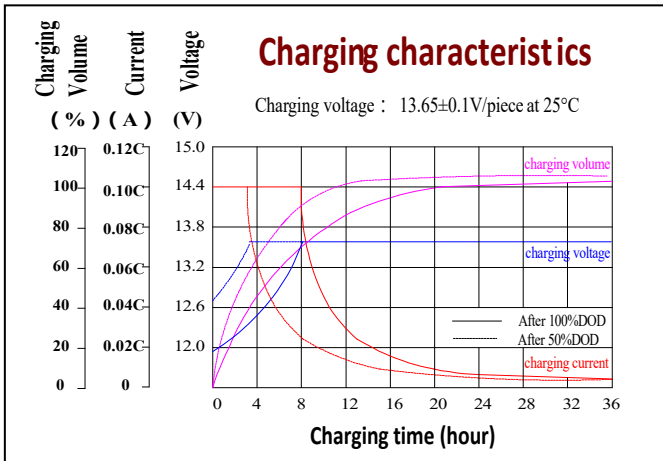

### Battery Construction

Component	Positive plate	Negative plate	Container & Cover	Safety valve	Terminal	Separator	Electrolyte	Pillar seal
Features	Thick high Sn low Ca grid with special paste	Balanced Pb-Ca grid for improved recombination efficiency	Fire resistant ABS (UL94-V0 optional)	Flame Si-Rubber and aging resistance	Female Copper Insert M8	Advanced PVC /AGM separator for high pressure cell design	Silicon Gel	Two layers epoxy resin seal